

CORITEC COR-D26



Three rows LCD display with graphic indicators and backlight

Technical specifications

LCD screen : two rows 6 digits height 25 mm, one row 5 digits height 15 mm, spanish, portuges and english indicators. Graphic icons: high flow, battery, pressure limit switch, warning and error.

External temperature measurement.

Low current backlight, 5Vcc, 90 mA.

ABS plastic injection case, front 3mm glass.

Electrical specification

Power supply	5 Vcc ±20%
Serial interface	2 wires (i ² C)
Backlight off	16 mA
Backlight on	106mA

Dimensions (large x width x height in mm) 242 x 52 x 182


Weight 0.65 kg

Two meter four wire cable connection, threaded conector IP 67.

Classification Ex ib IIB T3 IP 65

Approval certificate BUREAU VERITAS BVG 084/4

Dimensions

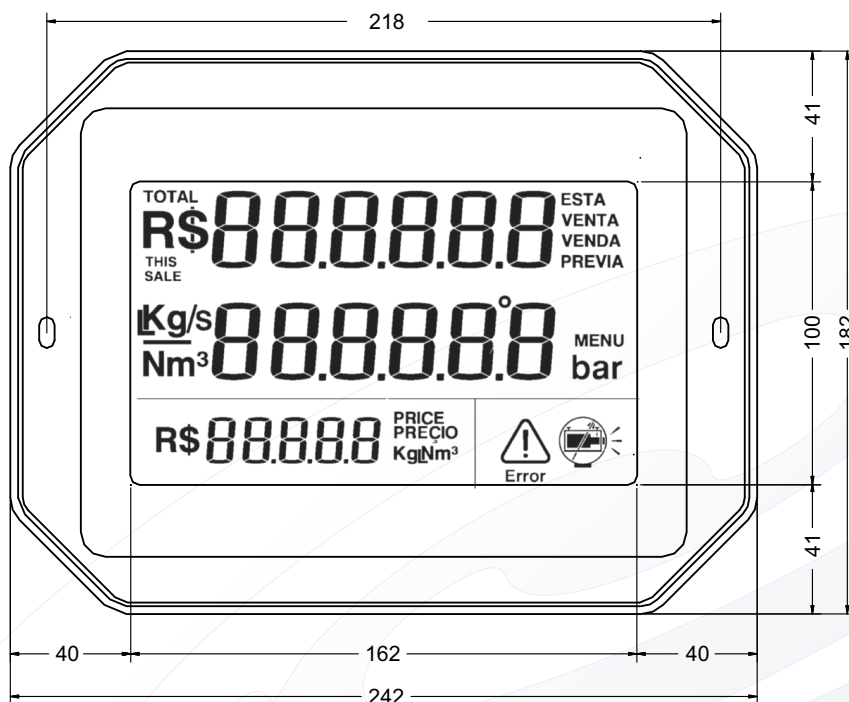

CORITEC s. r. l.

Yatay 146/148 (1184 ADB)
Buenos Aires - Argentina

Tel.: 054 11 4981-6437

Tel.: 054 11 4981-5742

www.coritec.com

e-mail: info@coritec.com.ar